




Republic of the Philippines
DEPARTMENT OF AGRICULTURE
Regional Field Office XII
Region 12 Center, Brgy. Carpenter Hill
Koronadal City, South Cotabato
TeleFax No. 083-228-3411 / 228-3413

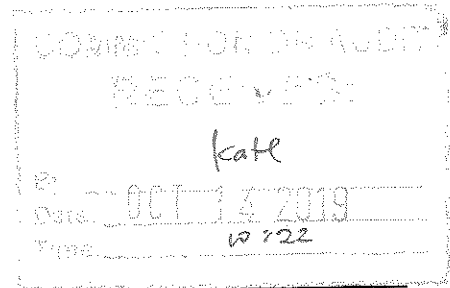

October 11, 2019

INVITATION TO BID

The Department of Agriculture, Regional Field Office No. 12 (DA-RFO 12), Koronadal City, South Cotabato through its General Appropriation Act (GAA) for Year 2019 and Continuing Appropriation 2018 invites prospective and interested bidders for the procurement of the following projects, to wit:

1. Supply and Delivery of 22 units Mechanical Corn Sheller
ABC: Php4,400,000.00 CORN PROGRAM 2018 AND 2019 [SAVINGS]

Specifications:

- Materials: AISI 4140 or its ISO equivalent
- Engine: 12 HP diesel, water-cooled
- Specific fuel consumption at maximum power: 280 g/ KW-h, maximum
- Continuous power at least 85% of the rated power
- Capacity: 2.75 tons/hr shelled corn based on 18-20 % M.C.
- Minimum Shelling Recovery: 97%
- Minimum Shelling Efficiency: 99%
- Shelling Loss: 0.5%
- Purity: minimum 99%
- Net cracked kernel: maximum 5%
- Warranty: 1 year for the machine and 2 years for the engine
- Materials and Component: All Brand new
- With basic tools and accessories and with adjustable wrench
- Specification should be signed and sealed by RPAE with valid PRC ID
- With AMTEC test result for machine and engine

- Delivery Period: 25 Calendar Days
- Delivery Site: DA-Tupi RES, Brgy. Bololmala, Tupi, South Cotabato

- Cost of Bidding Documents: Php5,000.00

*Note: Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney whichever is applicable coupled with SPECIMEN SIGNATURE on or before the schedule of Opening of Sealed Bids***

2. Construction of 1 unit Farm Machinery Shed CORN PROGRAM 2019
ABC: Php2,000,000.00

Project Description:

- Construction of 14.1 m x 20m Machinery Shed with Clear Height of 6 meters (F.F.L Roof Apex Line)

- Project Duration: 109 Calendar Days
- Project Site: DA-Tupi RES, Brgy. Bololmala, Tupi, South Cotabato

- Cost of Bidding Documents: Php5,000.00

*Note: Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney whichever is applicable coupled with SPECIMEN SIGNATURE on or before the schedule of Opening of Sealed Bids***

3. Construction of 7 units Multi-Commodity Drying Pavement
ABC: Php2,380,000.00 CORN PROGRAM 2018 (Continuing)

Project Description:

- Construction of 420 sq.m Multi Commodity Drying Pavement
- Dimension: L = 28m, W=15m, t=0.10m

- Project Duration: 161 Calendar Days
- Project Sites:
 - a. United People of Brgy. San Juan, Brgy. San Juan, Malungon, Sarangani Prov.
 - b. Alamilas Vegetable Farmers Ass., Barangay Spring Alabel, Sarangani Province
 - c. Lambayong FA, Lambayong Amsipit, Maasim, sarangani Province
 - d. Talyawid and Kapawagida Farmers Association, Brgy. Piñol, Maitum, Sarangani Province
 - e. BLGU Tokawal, Purok 6B, barangay Tokawal, Alabel, Sarangani
 - f. Tiwallup Irrigators Association, barangay Narra Tibuhol, Palimbang, Sultan Kudarat
 - g. Upper Masagana RIC, Upper Masagana, Brgy. Lun Padidu, Malapatan Sarangani

- Cost of Bidding Documents: Php5,000.00

*Note: Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney** whichever is applicable coupled with **SPECIMEN SIGNATURE** on or before the schedule of Opening of Sealed Bids*

4. Construction of 20 units Multi-Commodity Drying Pavement
Total ABC: Php6,800,000.00 CORN PROGRAM 2019

Line Item No. 1: Construction of 7 units Multi-Commodity Drying Pavement for North Cotabato
ABC: Php2,380,000.00

Project Description:

- Construction of 420 sq.m Multi Commodity Drying Pavement
- Dimension: L = 28m, W=15m, t=0.10m

- Project Duration: 161 Calendar Days
- Project Sites:
 - a. Brgy. Tanod Central Panatan Farmers Association , Prk. 7 Brgy. Panatan,Pigcawayan, North Cotabato
 - b. B. Cadungon Farmers Association, Prk. 1 Cadungon, Antipas,North Cotabato
 - c. Kibenes Farmers Association ,Prk. Proper Brgy. Kibenes, Carmen,North Cotabato
 - d. BLGU Sto. Nino, Sitio Del Pelar,Brgy. Sto. Nino,Arakan,North Cotabato
 - e. Montay Corn Cluster, Sitio Piarro,Brgy. Montay,Libungan,North Cotabato
 - f. Sultan Disomnong Farmers Association,Brgy. Guiling Alamada,North Cotabato
 - g. Aparatok Farmers Association,Prk. 7 Polayagan,Alamada,North Cotabato

- Cost of Bidding Documents: Php5,000.00

Line Item No. 2: Construction of 4 units Multi-Commodity Drying Pavement for Sultan Kudarat
ABC: Php1,360,000.00

Project Description:

- Construction of 420 sq.m Multi Commodity Drying Pavement
- Dimension: L = 28m, W=15m, t=0.10m

- Project Duration: 92 Calendar Days

- Project Sites:
 - a. Alliance of Christian and Manobo Upland Farmers Association, Brgy. Midtungok, Sen. Ninoy Aquino, Sultan Kudarat
 - b. BLGU Busok, Prk. Masunurin, Brgy. Busok, Bagumbayan, Sultan Kudarat
 - c. Limulan Coffee Growers Association, Prk. 2 Brgy. Limulan, Kalamansig, Sultan Kudarat
 - d. Brgy. Bulalawan, Prk. Centro, Brgy. Bulalawan, Lebak, Sultan Kudarat
- Cost of Bidding Documents: Php5,000.00

Line Item No. 3: Construction of 5 units Multi-Commodity Drying Pavement for South Cotabato
ABC: Php1,700,000.00

Project Description:

- Construction of 420 sq.m Multi Commodity Drying Pavement
- Dimension: L = 28m, W=15m, t=0.10m
- Project Duration: 115 Calendar Days
- Project Sites:
 - a. Brgy. Afus Landowners & FA, Sitio Byabas, Brgy Afus, Tboli, South Cotabato
 - b. BLGU Batomelong, Prk. 12, Brgy Batomelong, General Santos City
 - c. Malya Integrated Farmers Association (MIFA), Prk. Mahayahay, Brgy. Malaya, Banga, South Cotabato
 - d. Tinongcop Agrarian Reform Beneficiaries MPC, Prk. Bendia, Brgy Tinongcop, Tantangan, South Cotabato
 - e. Banga Agrarian Reform Community Cooperative, Barangay Malaya, Banga South Cotabato
- Cost of Bidding Documents: Php5,000.00

Line Item No. 4: Construction of 4 units Multi-Commodity Drying Pavement for Sarangani Province
ABC: Php1,360,000.00

Project Description:

- Construction of 420 sq.m Multi Commodity Drying Pavement
- Dimension: L = 28m, W=15m, t=0.10m
- Project Duration: 92 Calendar Days
- Project Sites:
 - a. Molo Farmers Association, Prk. Sudlon, Brgy Libi, Malapatan, Sarangani
 - b. Samahan ng mga Magbubukid ng Tuyan, Brgy. Tuyan, Malapatan, Sarangani
 - c. Upper Valley RIC, Brgy. Tianadatu, Maitum, Sarangani Province
 - d. Lun Masla Farmers Association, Upper Lun Masla, Malapatan, Sarangani
- Cost of Bidding Documents: Php5,000.00

*Note: Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney** whichever is applicable coupled with **SPECIMEN SIGNATURE** on or before the schedule of Opening of Sealed Bids*

5. Concreting of 1 unit Road at Livestock Production Center
ABC: Php1,500,000.00 LIVESTOCK PROGRAM 2019

Project Description:
ROAD CONCRETING:

- Length: 80 meters
- Width: 5 meters
- Thickness: 0.15 meters
- Shouldering: 2.00 meters

Drainage Canal:

- Length: 105 meters

BOX CULVERT:

- Length (including wing wall): 11 meters
- Width: 4 meters
- Height: 3 meters
- Project Duration: 51 Calendar Days
- Project Site: Balindog RES, Kidapawan City, North Cotabato
- Cost of Bidding Documents: Php5,000.00

Note: Prospective Bidders must submit a copy of Board Resolution or Secretary's Certificate/Special Power of Attorney whichever is applicable coupled with SPECIMEN SIGNATURE on or before the schedule of Opening of Sealed Bids

6. Establishment of Feedmill
Total ABC: Php6,000,000.00

LIVESTOCK PROGRAM 2019

Line Item No. 1: Establishment of Feedmill in M'lang, North Cotabato
ABC: Php3,000,000.00

I. Construction of Feedmill Building

Project Description:

Village type Feedmill

- Length: 12 meters
- Width: 10 meters
- Height: 6.7 meters from NGL to Apex Line

II. Supply, Delivery, Installation and Operators Training of Various Equipment for the Village-Type Feedmill

Specifications:

A. HAMMER MILL WITH BLOWER AND MOTOR

- Input Capacity: 250 kgs/hour minimum
- Main Drive Motor: 5 Hp 3 Phase, 220V motor
- Reduction Ratio: 50:1
- WITH sets of screen
- V-belt drive
- Manual loading and discharging
- Concrete Machine Foundation
- Wye Delta Controller included and ampere gauge for feeding monitoring
- Installation of Machine with foundation
- With AMTEC system Test
- Must be signed and sealed by a Agricultural and Biosystems Engineer (ABE)

B. HORIZONTAL FEEDMIXER with Holding and Discharge Mill

- Capacity: 200 kgs per hour minimum
- Main Drive Motor: 5 Hp 3 Phase 220V
- Bucket Elevator with 2 Hp motor for holding bin loading
- Mixing Device: helical ribbon metal or paddle type
- Manual discharge of feeds
- With AMTEC system Test
- Must be signed and sealed by a Agricultural and Biosystems Engineer (ABE)

C. PELLET MILL with Mixer

- Rated Capacity: 250 kgs per hour minimum
- All steel framing; individual electric motor drive
- Electrical Wiring and accessories; panel switch board
- horizontal Type pellet Maker with 10" diameter x 4" made of mild steel
- 3 Hp motor drive,
- 3 Hp drive motor mixer
- With AMTEC system Test
- Must be signed and sealed by a Agricultural and Biosystems Engineer (ABE)

Additional Requirement:

- With free Operational Training for Equipment
- Project Duration: 135 Calendar Days
- Project Site: Nursery Site, Pob. A, Mlang, North Cotabato
- Cost of Bidding Documents: Php5,000.00

**Line Item No. 2: Establishment of Feedmill in Pres. Roxas, North Cotabato
ABC: Php3,000,000.00**

I. Construction of Feedmill Building

Project Description:

Village type Feedmill

- Length: 12 meters
- Width: 10 meters
- Height: 6.7 meters from NGL to Apex Line

**II. Supply, Delivery, Installation and Operators Training of Various
Equipment for the Village-Type Feedmill**

Specifications:

A. HAMMER MILL WITH BLOWER AND MOTOR

- Input Capacity: 250 kgs/hour minimum
- Main Drive Motor: 5 Hp 3 Phase, 220V motor
- Reduction Ratio: 50:1
- WITH sets of screen
- V-belt drive
- Manual loading and discharging
- Concrete Machine Foundation
- Wye Delta Controller included and ampere gauge for feeding monitoring
- Installation of Machine with foundation
- With AMTEC system Test
- Must be signed and sealed by a Agricultural and Biosystems Engineer (ABE)

B. HORIZONTAL FEEDMIXER with Holding and Discharge Mill

- Capacity: 200 kgs per hour minimum
- Main Drive Motor: 5 Hp 3 Phase 220V
- Bucket Elevator with 2 Hp motor for holding bin loading
- Mixing Device: helical ribbon metal or paddle type
- Manual discharge of feeds
- With AMTEC system Test
- Must be signed and sealed by a Agricultural and Biosystems Engineer (ABE)

C. PELLET MILL with Mixer

- Rated Capacity: 250 kgs per hour minimum
- All steel framing; individual electric motor drive
- Electrical Wiring and accessories; panel switch board
- horizontal Type pellet Maker with 10" diameter x 4" made of mild steel
- 3 Hp motor drive,
- 3 Hp drive motor mixer
- With AMTEC system Test
- Must be signed and sealed by a Agricultural and Biosystems Engineer (ABE)

Additional Requirement:

- With free Operational Training for Equipment
- Project Duration: 100 Calendar Days
- Project Site: Brgy. Labu-o, Pres. Roxas, North Cotabato
- Cost of Bidding Documents: Php5,000.00

*Note: Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney whichever is applicable***

coupled with SPECIMEN SIGNATURE on or before the schedule of Opening of Sealed Bids

7. Construction of 13 units Multi-Purpose Drying Pavement *RICE PROGRAM 2019*
Total ABC: Php4,409,990.78

Line Item No. 1: Construction of 7 units Multi-Purpose Drying Pavement for North Cotabato
ABC: Php2,374,610.42

Project Description:

- Area: 420 sq.m
- Dimension: L = 28m, W=15m, thickness =0.10m with 10mm Ø reinforcement steel bars (RSB)
- 0.60 m O.C. both ways
- 0.05 m thk. Sub Base Coarse
- With Steel Signage

Scope of Works:

- Excavation Works: 21 cu.m
- Embankment: 49 cu.m
- Sub-Base Coarse (Gravel Bedding): 21 cu.m.
- Reinforced Concrete: 42 cu.m.
- Masonry Works: 34.4 sq.m
- Steel Signage: 1 L.S.

- Project Duration: 175 Calendar Days
- Project Sites:
 - a. BLGU Damawato – Damawato, Tulanun, North Cotabato
 - b. BLGU F. Cajelo – F. Cajelo, Tulanun, North Cotabato
 - c. Silver Grains FA – Prk. Malipayon, Bagontapay, Mlang, North Cotabato
 - d. BLGU Buluan- Buluan, Pigcawayan, North Cotabato
 - e. Darussalam RIC – Sitio Darussalam, Pigcawayan, Alamada, North Cotabato
 - f. Lawaan FA – Barangiran, Alamada, North cotabato

- Cost of Bidding Documents: Php5,000.00

Line Item No. 2: Construction of 3 units Multi-Purpose Drying Pavement for Sultan Kudarat
ABC: Php1,017,690.18

Project Description:

- Area: 420 sq.m
- Dimension: L = 28m, W=15m, thickness =0.10m with 10mm Ø reinforcement steel bars (RSB)
- 0.60 m O.C. both ways
- 0.05 m thk. Sub Base Coarse
- With Steel Signage

Scope of Works:

- Excavation Works: 21 cu.m
- Embankment: 49 cu.m
- Sub-Base Coarse (Gravel Bedding): 21 cu.m.
- Reinforced Concrete: 42 cu.m.
- Masonry Works: 34.4 sq.m
- Steel Signage: 1 L.S.

- Project Duration: 75 Calendar Days
- Project Sites:
 - a. BLGU Guiamalia – Prk. 9, Brgy. Guimalia, Ezperanza, Sultan Kudarat
 - b. BLGU Kiadsam – Brgy. Kiadsam, Sen. Ninoy Aquino, Sultan Kudarat
 - c. BLGU Nati – Brgy. Nati, Sen. Ninoy Aquino, sultan Kudarat

- Cost of Bidding Documents: Php5,000.00

Line Item No. 3: Construction of 3 units Multi-Purpose Drying Pavement for South Cotabato
ABC: Php1,017,690.18

Project Description:

- Area: 420 sq.m
- Dimension: L = 28m, W=15m, thickness =0.10m with 10mm Ø reinforcement steel bars (RSB)
- 0.60 m O.C. both ways
- 0.05 m thk. Sub Base Coarse
- With Steel Signage

Scope of Works:

- Excavation Works: 21 cu.m
- Embankment: 49 cu.m
- Sub-Base Coarse (Gravel Bedding): 21 cu.m.
- Reinforced Concrete: 42 cu.m.
- Masonry Works: 34.4 sq.m
- Steel Signage: 1 L.S.

- Project Duration: 75 Calendar Days
- Project Sites:
 - a. Federation of free Farmers – Prk. Santa Cecilia, Sto. Niño, South Cotabato
 - b. San Jose Communal IA – Brgy. San Jose, Norala, South Cotabato
 - c. Subang Irrigators Association – Brgy. Dajay, surallah, South Cotabato

- Cost of Bidding Documents: Php5,000.00

*Note: Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney** whichever is applicable coupled with **SPECIMEN SIGNATURE** on or before the schedule of Opening of Sealed Bids*

8. Construction, Rehabilitation and Completion of 47 units Palay Shed
Total ABC: Php9,483,076.78 *RICE PROGRAM 2019*

Line Item No. 1: Construction of 2 units Palay Shed
ABC: Php620,000.00

Project Description:

- Dimension: Width (W) = 7m, Length (L) =10m, Height (H)=4m

Scope of Works:

- Excavation Works: 4.8 cu.m
- Reinforced Concrete: 8.78 cu.m.
- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot

- Project Duration: 38 Calendar Days
- Project Sites:
 - a. KIBIA FARMERS ASSOCIATION – Kibia, Matalam, North Cotabato
 - b. MINAPAN FARMERS ASSOCIATION – Minapan, Tulunan, North Cotabato

- Cost of Bidding Documents: Php1,000.00

Line Item No. 2: Rehabilitation and Completion of 2 units Palay Shed
ABC: Php259,446.75

A. Rehabilitation and Completion of 1 unit Palay Shed

Scope of Works:

- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot

- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot
- Project Site: CABULING RAINFED RICE ASSOCIATION – Naci, Surallah, South Cotabato

B. Completion of 1 unit Palay Shed

Project Description: W = 7m, L = 10m, H = 4m

Scope of Works:

- Reinforced Concrete: 7 cu.m
- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot
- Project Site: Luayan Communal Irrigators Association –Luayan, Tantaran, South Cotabato
- Project Duration: 36 Calendar Days
- Cost of Bidding Documents: Php500.00

**Line Item No. 3: Rehabilitation and Completion of 13 units Palay Shed
ABC: Php113,431.50**

Project Description:

- Dimension: Width (W) = 1.5m, Length (L) =1m, Height (H) =1.5m

Scope of Works:

- Steel Signage: 1 Lot
- Project Duration: 40 Calendar Days
- Project Sites:
 - a. RIZAL FARMERS ASSOCIATION - Rizal, Banga, South Cotabato
 - b. PROVINCIAL GOVERNMENT OF OF SOUTH COTABATO-PROVINCIAL SCION AND GROVE NURSERY - Research and Demo Farm, Banga, South Cotabato
 - c. SOUTH COTABATO IRRIGATORS AGRICULTURAL FEDERATION INC - Concepcion, Koronadal City, South Cotabato
 - d. SIOK COMMUNAL IRRIGATORS ASSOCIATION - Siok, Koronadal City, South Cotabato
 - e. TOPLAND COMMUNAL IRRIGATORS ASSOCIATION - Topland, Koronadal City, South Cotabato
 - f. SAN JOSE MABINI COMMUNAL IRRIGATORS ASSOCIATION - San Jose, Koronadal City, South Cotabato
 - g. R FLOWS IRRIGATORS ASSOCIATION - Esperanza, Norala, South Cotabato
 - h. CREEK MAGSAYSAY - POLOMOLOK IRRIGATORS ASSOCIATION - Magsaysay, Polomolok, South Cotabato
 - i. NEW ILO- ILO MULTI - SECTORAL ORGANIZATION - New Ilo-Ilo Tantaran, South Cotabato
 - j. LIBAS FARMERS SERVICE COOPERATIVE - Libas, Tantaran, South Cotabato
 - k. TALUFO SITIO ILOCANO FARMERS IRRIGATORS ASSOCIATION - Talupo, T'boli, South Cotabato
 - l. NEW CARMEN P4MP - New Carmen, Tacurong City, Sultan Kudarat
 - m. SAN PEDRO SUGARCANE PLANTEERS MULTI-PURPOSE COOPERATIVE - San Pedro, Pres. Quirino, Sultan Kudarat
- Cost of Bidding Documents: Php500.00

**Line Item No. 4: Construction of 1 unit Palay Shed
ABC: Php310,000.00**

Project Description:

- Dimension: Width (W) = 7m, Length (L) = 10m, Height (H) = 4m

Scope of Works:

- Excavation Works: 4.8 cu.m
- Reinforced Concrete: 8.78 cu.m.
- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot

- Project Duration: 38 Calendar Days
- Project Site: MARAWIR FARMERS ASSOCIATION – Salumping, Esperanza, Sultan Kudarat

- Cost of Bidding Documents: Php500.00

**Line Item No. 5: Construction of 2 units Palay Shed
ABC: Php620,000.00****Project Description:**

- Dimension: Width (W) = 7m, Length (L)=10m, Height (H)=4m

Scope of Works:

- Excavation Works: 4.8 cu.m
- Reinforced Concrete: 8.78 cu.m.
- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot

- Project Duration: 38 Calendar Days
- Project Sites:
 - a. PUROK PINAG ISANG LAHI FARMERS ASSOCIATION - Udtong, Lambayong, Sultan Kudarat
 - b. PUROK TAGUMPAY FARMERS ASSOCIATION - Udtong, Lambayong, Sultan Kudarat

- Cost of Bidding Documents: Php1,000.00

**Line Item No. 6: Construction of 7 units Palay Shed
ABC: Php2,170,000.00****Project Description:**

- Dimension: Width (W) = 7m, Length (L) = 10m, Height (H)=4m

Scope of Works:

- Excavation Works: 4.8 cu.m
- Reinforced Concrete: 8.78 cu.m.
- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot

- Project Duration: 140 Calendar Days
- Project Sites:
 - a. BLGU KANULAY - Kanulay, Bagumbayan, Sultan Kudarat
 - b. BLGU KISEK - Kisek, Palimbang, Sultan Kudarat
 - c. BLGU MIDOL - Midol, Palimbang, Sultan Kudarat
 - d. COASTAL FARMERS AND FISHERFOLKS ASSOCIATION - Badiangon, Palimbang, Sultan Kudarat
 - e. BLGU LANGGAL - Langgal, SNA, Sultan Kudarat
 - f. LGU SNA - Malegdeg, SNA, Sultan Kudarat
 - g. BLGU KADI - Kadi, SNA, Sultan Kudarat

- Cost of Bidding Documents: Php5,000.00

Line Item No. 7: Construction, Rehabilitation and Completion of 6 units Palay Shed
ABC: Php1,740,000.00

Project Description:

- Dimension: Width (W) = 7m, Length (L) = 10m, Height (H) = 4m

Scope of Works:

- Excavation Works: 4.8 cu.m
- Reinforced Concrete: 8.78 cu.m.
- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot

- Project Duration: 120 Calendar Days
- Project Sites:
 - a. PANUMA SWISA - Numo, Esperanza, Sultan Kudarat
 - b. BLGU DALADAP - Daladap, Esperanza, Sultan Kudarat
 - c. BLGU VILLAMOR - Villamor, Esperanza, Sultan Kudarat
 - d. MAMAGAYON FARMERS ASSOCIATION - Tambak, Lambayong, Sultan Kudarat
 - e. MORO FARMERS ASSOCIATION - Caridad, Lambayong, Sultan Kudarat
 - f. SAMAHAN NG MGA MAGSASAKA NG PRESIDENT QUIRINO - Poblacion, Pres. Quirino, Sultan Kudarat

- Cost of Bidding Documents: Php5,000.00

Line Item No. 8: Rehabilitation and Completion of 2 units Palay Shed
ABC: Php291,839.59

A. Rehabilitation and Completion of 1 unit Palay Shed

Scope of Works:

- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot

- Project Site: COMMUNITY HARDWORKING RURAL DWELLERS ASSOCIATION OF BAMBAD - Bambad, Isulan, Sultan Kudarat

B. Completion of 1 unit Palay Shed

Scope of Works:

- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot

- Project Site: QUIPOLOT IRRIGATORS ASSOCIATION - D'lesdesma, Tacurong City

- Project Duration: 20 Calendar Days
- Cost of Bidding Documents: Php500.00

Line Item No. 9: Rehabilitation and Completion of 2 units Palay Shed
ABC: Php278,358.94

Scope of Works:

- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot

- Project Duration: 20 Calendar Days
- Project Sites:
 - a. PANAS IRRIGATORS ASSOCIATION - Nuling, Lebak, Sultan Kudarat
 - b. KIDANAO FARMERS ASSOCIATION - Basak, Lebak, Sultan Kudarat
- Cost of Bidding Documents: Php500.00

Line Item No. 10: Construction of 6 units Palay Shed
ABC: Php1,860,000.00

Project Description:

- Dimension: Width (W) = 7m, Length (L) = 10m, Height (H) = 4m

Scope of Works:

- Excavation Works: 4.8 cu.m
- Reinforced Concrete: 8.78 cu.m.
- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot
- Project Duration: 180 Calendar Days
- Project Sites:
 - a. LAMLANGIL UPLAND FARMERS ASSOCIATION - Lamlangil, Maasim, Sarangani
 - b. BLGU TUGUIS - Tuguis, Kiamba, Sarangani
 - c. KIAMBING FARMERS ASSOCIATION - Kiambing, Maitum, Sarangani
 - d. GAWAN FARMERS ASSOCIATION - Gawan, Maitum, Sarangani
 - e. BLGU TUANADATU - Tuanadatu, Maitum, Sarangani
 - f. UNITED BANGSAMORO FARMERS ASSOCIATION - Pinol, Maitum, Sarangani
- Cost of Bidding Documents: Php5,000.00

Line Item No. 11: Construction of 4 units Palay Shed
ABC: Php1,220,000.00

A. Construction of 3 units Palay Shed

Project Description:

- Dimension: Width (W) = 7m, Length (L) = 10m, Height (H) = 4m

Scope of Works:

- Excavation Works: 4.8 cu.m
- Reinforced Concrete: 8.78 cu.m.
- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot
- Project Sites:
 - a. BLGU KIHAN - Malapatan, Sarangani
 - b. BLGU SUFATUBO - BLGU, Sufatubo, Glan, Sarangani
 - c. PANGYAN-KUYA IRRIGATORS ASSOCIATION - Pangyan, Glan, Sarangani

B. Construction of 1 unit Palay Shed

Project Description:

- Dimension: Width (W) = 7m, Length (L) = 10m, Height (H) = 4m

Scope of Works:

- Excavation Works: 4.8 cu.m
- Reinforced Concrete: 8.78 cu.m.
- Cement Plaster Finish: 18 sq.m.
- Painting Works: 75.84 sq.m.
- Metal Structures Steel Strut Beam, Truss & Purlins: 1 lot
- Metal Roofing: 90.71 sq.m
- Steel Signage: 1 Lot

- Project Duration: 120 Calendar Days
- Project Site: **BLGU Baluan – Baluan, General Santos City**
- Cost of Bidding Documents: Php5,000.00

*Note: Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney** whichever is applicable coupled with **SPECIMEN SIGNATURE** on or before the schedule of Opening of Sealed Bids*

9. Construction, Rehabilitation and Completion of 5 units Mini-Warehouse
Total ABC: Php2,156,015.88

RICE PROGRAM 2019

Line Item No. 1: Rehabilitation and Completion of 1 unit Mini-Warehouse at General Santos City
ABC: Php50,771.44

Project Description:

- Dimension: Width (W) = 6m, Length (L)=7m

Scope of Works:

- Masonry Works: 0.72 sq.m
- Doors (Aluminum Roll – up Door): 7.50 sq.m
- Painting Works (DA Logo and Markings) 1 lot
- Project Duration: 7 Calendar Days
- Project Site: BALUAN-LAGAO FARMERS IRRIGATORS ASSOCIATION (BALAFAIRAS) – Purok Masagana, Baluan, General Santos City
- Cost of Bidding Documents: Php500.00

Line Item No. 2: Construction/Completion of 2 units Mini-Warehouse in North Cotabato
ABC: Php755,244.44

A. Rehabilitation and Completion of 1 unit Mini-Warehouse

Project Description:

- Dimension: Width (W) = 6m, Length (L) =18.0m, Height (H) = 4.9m

Scope of Works:

- Reinforced Concrete: 16 cu.m.
- Masonry Works (Forms and Scaffolding): 39.64 sq.m
- Cement Plaster Finish: 389.78 sq.m.
- Doors (Aluminum Roll – up Door): 1 set
- Painting Works: 559.32 sq.m.
- Metal Structure (Truss & Purlins): 102.00 pcs
- Metal Roofing: 168 sq.m.
- Project Site: Rangayen, Alamada, North Cotabato

B. Rehabilitation and Completion of 1 unit Mini-Warehouse

Project Description:

- Dimension: Width (W) = 6m, Length (L) =7.0m

Scope of Works:

- Doors (Aluminum Roll – up Door): 7.5 sq.m
- Metal Structure (Furring): 33.00 Length
- Painting Works (DA Logo and Markings): 1 Lot
- Project Site: MAKINUGON FARMERS ASSOCIATION - Makinugon, Ugalingan, Carmen, North Cotabato
- Project Duration: 67 Calendar Days

- Cost of Bidding Documents: Php1,000.00

**Line Item No. 3: Construction of 1 unit Mini-Warehouse at Sultan Kudarat
ABC: Php650,000.00**

Project Description:

- Dimension: Width (W) = 6m, Length (L) =12.0m

Scope of Works:

- Excavation: 36 cu.m.
- Foundation Fill/Backfilling: 12.15 cu.m.
- Reinforced Concrete: 18.18 cu.m.
- Masonry Works (Forms and Scaffolding): 137.90 sq.m
- Cement Plaster Finish: 324.80 sq.m.
- Doors (Aluminum Roll – up Door): 1 set
- Painting Works: 427.86 sq.m.
- Metal Structure (Truss & Purlins): 61.00 pcs
- Metal Roofing: 117.60 sq.m.
- Project Site: Rajah Muda, Tacurong City, Sultan Kudarat
- Project Duration: 75 Calendar Days
- Cost of Bidding Documents: Php1,000.00

**Line Item No. 4: Construction of 1 unit Mini-Warehouse at Sarangani
ABC: Php700,000.00**

Project Description:

- Dimension: W = 6m, L=12.0m

Scope of Works:

- Excavation: 36 cu.m.
- Foundation Fill/Backfilling: 13.97cu.m.
- Reinforced Concrete: 18.18 cu.m.
- Masonry Works (Forms and Scaffolding): 137.90 sq.m
- Cement Plaster Finish: 324.80 sq.m.
- Doors (Aluminum Roll – up Door): 1 set
- Painting Works: 427.86 sq.m.
- Metal Structure (Truss & Purlins): 61.00 pcs
- Metal Roofing: 117.60 sq.m.
- Project Site: Sitio Lambalot, Upper Biangan, Malungon, Sarangani
- Project Duration: 75 Calendar Days
- Cost of Bidding Documents: Php1,000.00

*Note: Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney whichever is applicable coupled with SPECIMEN SIGNATURE on or before the schedule of Opening of Sealed Bids***

**10. Construction of Packing House in Brgy. Maribulan, Alabel, Sarangani Province
ABC: Php1,150,000.00** *HVCDP 2018*

Project Description:

- A. Construction of 8.0 m x 12.0 m Packing House
 - a.) 3.0 m 7.0 m Dehanding Area
 - b.) 8.0 m x 12.0 m Processing Area
- Project Duration: 58 Calendar Days
- Project Site: Barangay Maribulan, Alabel, Sarangani Province
- Cost of Bidding Documents: Php5,000.00

*Note : Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney** whichever is applicable coupled with **SPECIMEN SIGNATURE** on or before the schedule of Opening of Sealed Bids.*

11. Construction of Banana Chips Processing Facility Building in Brgy. Sta. Felomina, Makilala, North Cotabato HUCDP 2018
ABC: Php1,200,000.00

Project Description:

- a.) 3.0 m 7.0 m Dehanding Area
- b.) 8.0 m x 12.0 m Processing Area

- Project Duration: 65 Calendar Days
- Project Site: LGU-Demo Farm, Barangay. Sta. Felomina, Makilala, North Cotabato

- Cost of Bidding Documents: Php5,000.00

*Note : Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney** whichever is applicable coupled with **SPECIMEN SIGNATURE** on or before the schedule of Opening of Sealed Bids.*

12. Construction of 2 units Rubber Sheet Processing Facility Building
Total ABC: Php2,500,000.00 HUCDP 2018

Line Item No. 1: Construction of Rubber Sheet Processing Facility Building in Brgy. Bai Saripinang, Bagumbayan, Sultan Kudarat
ABC: Php1,250,000.00

Project Description:

- 7.0 m x 12.0 m with 5.70 m Clear Height (N.G.L. to Roof Apex Line) with office and stocking area

- Project Duration: 95 Calendar Days
- Project Site: Barangay Bai Saripinang, Bagumbayan, Sultan Kudarat

- Cost of Bidding Documents: Php5,000.00

Line Item No. 2: Construction of Rubber Sheet Processing Facility Building in Brgy. Lasak, Columbio, Sultan Kudarat
ABC: Php1,250,000.00

Project Description:

- 7.0 m x 12.0 m with 5.70 m Clear Height (N.G.L. to Roof Apex Line) with office and stocking area

- Project Duration: 95 Calendar Days
- Project Site: Barangay Lasak, Columbio, Sultan Kudarat

- Cost of Bidding Documents: Php5,000.00

*Note : Prospective Bidders must submit a copy of **Board Resolution or Secretary's Certificate/Special Power of Attorney** whichever is applicable coupled with **SPECIMEN SIGNATURE** on or before the schedule of Opening of Sealed Bids.*

- A. Bids submitted in excess of the ABC shall be automatically disqualified during bid opening.
- B. Bidding will be conducted through open competitive bidding procedures using a non-discretionary "pass/fail" criterion as specified in the Implementing rules and Regulations (IRR) of Republic Act (RA) 9184, otherwise known as the "Government Procurement Reform Act".

Bidding is restricted to Filipino citizens/sole proprietorship, partnerships, corporation or organizations with at least sixty percent (60%) interest or outstanding capital stock belonging to citizens of the Philippines, and to the citizens or organizations of a country the laws or regulations of which grant similar rights or privileges to Filipino citizens, pursuant to RA 5183 and subject to Commonwealth Act 138.

- C. Interested bidders may obtain further information from DA-RFO 12 and inspect the Bidding Documents at the address given below during office hours from 8:00AM until 5:00PM.

A complete set of Bidding Documents may be purchased by interested Bidders commencing on dates as stated from the address below and upon payment of a non-refundable fee for the Bidding Documents in the amount as stated above.

- D. The DA-RFO 12 will hold a Pre-bid Conference on **October 21, 2019 – 10:00AM at DA-12 Conference Hall (2nd Floor), Brgy. Carpenter Hill, Koronadal City** which shall be opened to all interested parties.
- E. The **Opening of Sealed Bids** shall be on **November 4, 2019 at 10:00AM** in the **DA-RFO 12 Conference Hall (2nd Floor), Brgy. Carpenter Hill, Koronadal City**.
- F. The bidding will be on a **TWO-ENVELOPE SYSTEM (Envelope A and Envelope B) Technical and Financial Envelopes**. Each envelope shall contain 3 envelopes marked as "Original Copy", "Copy 1", and "Copy 2". Technical Documents must have **marker/eartab** and must be in chronological order as stipulated in the Checklist of Requirements.

The two (2) envelopes, Technical and Financial shall be labeled as Envelope A-Technical Documents and Envelope B-Financial Documents, respectively.

All envelopes shall: a) contain the name of the contract to be bid in capital letters, b) bear the name and address of the Bidder in capital letters, c) be addressed to the Procuring Entity's BAC in accordance with ITB Clause 1.1, d) bear the specific identification of this bidding process indicated in the ITB Clause 1.2, and e) bear a warning "DO NOT OPEN BEFORE..." the date and time for the opening of bids, in accordance with ITB Clause 21.

- G. Bids must be delivered to the address below **on or before November 4, 2018, 10:00AM on**. All bids must be accompanied by a bid security in the form of Cash or Cashier's/Manager's check; Surety Bond callable upon demand issued by a surety or insurance company duly certified by the Insurance Commission as authorized to issue such security (5% of the ABC); or Bid Securing Declaration (duly notarized).
- H. The Department of Agriculture, Regional Office No. 12, Koronadal City reserves the right to accept or reject any bid, to annul the bidding process, and to waive any minor defects, without thereby incurring any liability to the affected bidder/s and to accept bid as may be considered most advantageous to the government.

I. LATE BIDS WILL NOT BE ACCEPTED.

J. For further information, please refer to: **ANNABELLE V. OMICTIN**

Head, BAC Secretariat

BAC Secretariat Office

Regional Center Compound, Brgy. Carpenter Hill

Koronadal City, South Cotabato

TeleFax No. : 083-228-3411

Email Address : bac.darfo12@gmail.com

Approved by: ✓ 1

ZALDY M. BOLORON

BAC Chairperson for Infrastructure,
Machineries, Agricultural Equipment
and Irrigation 9