



Republic of the Philippines

DEPARTMENT OF AGRICULTURE

REGIONAL FIELD OFFICE No. 12
CSA-1 BUILDING, ZULUETA STREET
KORONADAL CITY
TEL No./FAX No. (083)-520-0564

October 7, 2014

NOTICE TO PROCEED/DELIVER

THE PROPRIETOR

Palmares General Merchandise
#5 Public Market Bldg., Magsaysay Avenue
Tacurong City, Sultan Kudarat

Sir/Madam:

Having entered into a contract with the Department of Agriculture, Regional Field Office No. 12, Koronadal City, you are authorized to proceed the **Concreting of Libas -Maibo FMR in Brgy. Libas, Tantangan, South Cotabato** with **ITB Reference No. 2728905** in the amount of **Sixteen Million Two Hundred Sixty-Six Thousand Three Hundred Fifty-Eight Pesos (Php16,266,358.00)**, subject to the terms and conditions of the contract, with the following Project Description and Scope of Works, to wit:

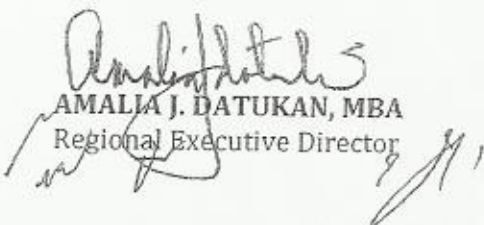
Project Description : Concreting of 2.0 km road at 5.0 l.m. width and 20 cm thickness with 1.5 l.m. gravel shoulder on both sides, construction of Grouted Riprap (headwall/lined canal) and installation of RCP

Scope of Works:


Item 102	- Roadway Excavation	: 4,220.77 m ³
Item 104	- Embankment	: 1,964.35 m ³
Item 500-A	- Pipe Culvert	: 5 l.m.
Item 103(1)	- Structure Excavation	: 1,049.15 m ³
Item 506	- Stone Masonry (headwall / lined canal)	: 329.52 m ³
Item 505	- Grouted Riprap	: 394.92 m ³
Item 103(3)	- Foundation Backfill	: 413.49 m ³
Item 105(1)	- Subgrade preparation	: 18,000 m ²
Item 201	- Aggregate Base Course (base and shoulder)	: 4,720 m ³
Item 311(1)	- Portland Cement Concrete Pavement	: 10,000 m ²
SPCL "A"	- Informative sign board	: 1 lump sum

Project Duration : **180 Calendar Days**

Very truly yours,


AMALIA J. DATUKAN, MBA
Regional Executive Director

Conformed:


PACIANO

Print Name and Signature

Date : 10/7/14