



Republic of the Philippines
DEPARTMENT OF AGRICULTURE
Regional Field Office 12
CSA Building, Zulueta Street, Koronadal City
BAC Secretariat Office Tel./Fax No. 5200564



April 8, 2014

NOTICE TO PROCEED

The Proprietor
RDEN Construction and Supply
Quezon Avenue, Libungan, North Cotabato

Sir:

Having entered into a contract with the Department of Agriculture, RFO 12, Koronadal City, you are hereby authorized to proceed with the **Construction of Datu Binasing Small Water Impounding Project (SWIP) Located at Datu Binasing, Pigcawayan, Cotabato in the amount of Sixteen Million Nine Hundred Ninety-Three Thousand Seven Hundred Eight Pesos And 52/100 (Php16,993,708.52)**, subject to the terms and conditions of the contract agreement with the following Scope of Works:

Item No.	Description	Unit	Quantity
	DAM WORKS:		
I.			
1.1	CLEARING AND GRUBBING	L.S	L.S
1.2	EXCAVATION		
	1.2a Stripping	cu.m	4,250.00
	1.2b Core Trench	cu.m	1,560.00
1.3	EMBANKMENT FILL		
	1.3a Side borrow	cu.m	21,867.00
	1.3b Hauled materials	cu.m	5,831.20
	1.3c From core Trench and Spillway Excavation	cu.m	1,457.80
1.4	HANDLAID RIPRAP	cu.m	667.78
1.5	GRAVEL BLANKET	cu.m	474.00
1.6	SPRIGGING AND SODDING	cu.m	3,500.00
1.7	TOE DRAIN		
	1.7a Rock toe	cu.m	135.00
	1.7b Fine sand Transition	cu.m	104.10
	1.7c Gravel and Sand Transition	cu.m	98.40
1.8	GRAVEL SURFACING	cu.m	990.00
II.	SPILLWAY WORKS		
	II.1 Excavation	cu.m	619.10
	II.2 Structural Backfill	cu.m	672.80
	II.3 Concrete Class "A"	cu.m	108.84
	II.4 Reinforcing Steel Bar	kg	5,442.00
	II.5 Grouted Riprap	cu.m	23.10
	II.6 Leveling Course	cu.m	58.50

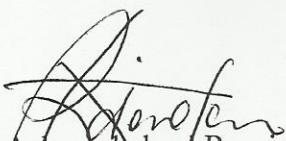
III. OUTLET WORKS

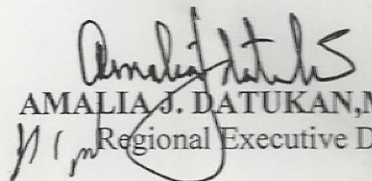
III.1	Excavation	cu.m	37.50
III.2	Structural Backfill	cu.m	25.50
III.3	Concrete Class "A"	cu.m	13.91
III.4	Reinforcing Steel Bar	kg.	598.13
III.5	Gate Valve: Cast Iron Flange Type 10" dia	assy.	1.00
III.6	Polyethylene Pipe(PE Pipe,SDR9,10"øx20"	pcs.	6.00
III.7	Fish screen/Trashrack	assy.	1.00
III.8	Flashboard	assy.	1.00

IV IRRIGATION WORKS

IV-A CANAL(=1056 METERS, 40Mx0.50M w/bridging)			
IV. A.1	Manual Excavation	cu.m	135.00
IV.A.2	Mechanical Excavation	cu.m	1,267.00
IV.A.3	Structural Backfill	cu.m	112.50
IV.A.4	Concrete Class "A"	cu.m	171.35
IV.A.5	Reinforcing Steel Bar	kg.	7,367.84
IV.A.6	Leveling Course	cu.m	69.63
IV.A.7	Flashboard	assy.	8.00
IV-B BOX CULVERT/ROAD CROSSING(3 sites), total length=295 meters			
IV.B.1	Manual Excavation	cu.m	17,625.00
IV.B.2	Structural Backfill	cu.m	12,297.00
IV.B.3	Concrete Class "A"	cu.m	160.00
IV.B.4	Reinforcing Steel Bar	kg	6,880.00
IV-C FLUME 93 SITES, TOTAL LENGTH-MTRS.			
IV.C.1	Manual Excavation	cu.m	47.52
IV.C.2	Structural Backfill	cu.m	23.76
IV.C.3	Concrete Class "A"	cu.m	200.77
IV.C.4	Reinforcing Steel Bar	kg	8,633.11
Project Completion: 160 calendar days			

Very truly yours,


 Acknowledged Receipt:
RUPERIO A. DEHOLAN
 Print Name & Signature
 Date 04/08/14


 AMALIA J. DATUKAN, MBA
 Regional Executive Director
 8/1